

TECHSEAL II TANDEM PACKER


PRODUCT 20-339

The **TechWest TechSeal II Tandem Packer** is a compact, tough and reliable single string hydraulic set retrievable packer ideal for use in deviated wells, multiple packer completions and applications where the packer(s) is to be set after the well is flanged up.

Since no mandrel movement occurs during setting, the *Techseal II* is ideal for multiple packer single string applications. Multiple packers can be set simultaneously or staged with optional wireline controlled selective setting.

FEATURES

- Minimum number of internal elastomeric seals for increased reliability.
- Straight pick-up shear release system, which is fully adjustable.
- Easily adjustable setting trigger.
- Short compact design is ideal for highly deviated wells.
- Multi-Durometer three piece element system.
- All components locked to prevent preset.

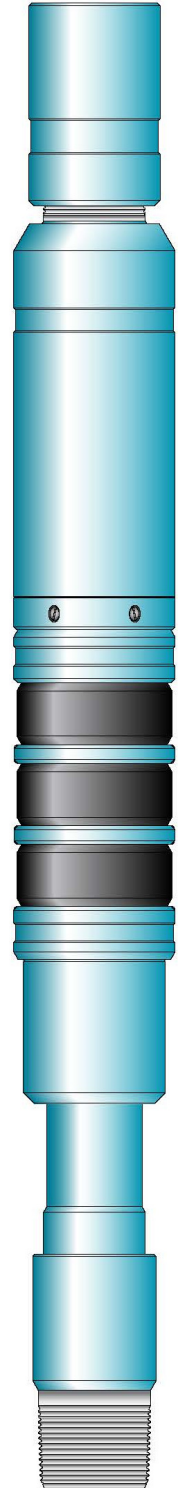

SPECIFICATIONS

20-339 SPECIFICATIONS									
Casing			TechSeal II						
Size	Weight		Product Number	Gauge		ID		Connection	
in / mm	lbs/ft	kg/m		in	mm	in	mm	in	mm
4 101.6	11.6	17.3	20-339-1940	3.328	84.5	1.610	40.9	1.900	48.3
	9.5	14.1	20-339-2340	3.420	86.9	1.938	49.2	2.375	60.3
4 1/2 114.3	9.5-13.5	14.1-20.1	20-339-2344	3.700	94.0	1.938	49.2	2.375	60.3
			20-339-2345	3.771	95.8				
5 127	15.0-18.0	22.3-26.8	20-339-2350	4.125	104.8	1.938	49.2	2.375	60.3
	11.5-13.0	17.1-19.3	20-339-2351	4.250	108.0				
5 1/2 139.7	15.5-20.0	23.1-29.8	20-339-2356	4.641	117.9	1.938	49.2	2.375	60.3
	13.0-14.0	19.3-20.8	20-339-2357	4.781	121.4				
	15.5-20.0	23.1-29.8	20-339-2756	4.641	117.9	2.375	60.3	2.875	73.0
	13.0-14.0	19.3-20.8	20-339-2757	4.781	121.4				
5 3/4 146.1	17.0-19.5	25.3-29.0	20-339-2758	4.950	125.7	2.375	60.3	2.875	73.0
6 5/8 168.3	28.0-32.0	41.7-47.6	20-339-2766	5.484	139.3	2.375	60.3	2.875	73.0
	24.0-28.0	35.7-41.7	20-339-2767	5.625	142.9				
7 177.8	32.0-35.0	47.6-52.1	20-339-2770	5.812	147.6	2.500	63.5	2.875	73.0
	26.0-29.0	38.7-43.2	20-339-2771	5.958	151.6				
	20.0-26.0	29.8-38.7	20-339-2772	6.078	154.4				
	17.0-20.0	25.3-29.8	20-339-2773	6.266	159.2				
	32.0-35.0	47.6-52.1	20-339-3570	5.812	147.6	3.000	76.2	3.500	88.9
	26.0-29.0	38.7-43.2	20-339-3571	5.958	151.6				
	20.0-26.0	29.8-38.7	20-339-3572	6.078	154.4				
	17.0-20.0	25.3-29.8	20-339-3573	6.266	159.2				
7 5/8 193.7	33.7-39.0	50.1-58.0	20-339-2775	6.453	163.9	2.500	63.5	2.875	73.0
			20-339-3575			3.000	76.2	3.500	88.9
	24.0-29.7	35.7-44.2	20-339-2776	6.672	169.5	2.500	63.5	2.875	73.0
			20-339-3576			3.000	76.2	3.500	88.9
8 5/8 219.1	44.0-49.0	65.5-72.9	20-339-3585	7.312	185.7	3.000	76.2	3.500	88.9
	32.0-40.0	47.6-59.5	20-339-3586	7.531	191.3				
	29.0-35.0	43.2-52.1	20-339-3588	7.856	199.5				
	20.0-28.0	29.8-41.7	20-339-3587	7.781	197.6				
9 5/8 244.5	47.0-53.5	69.9-79.6	20-339-3595	8.218	208.7	3.000	76.2	3.500	88.9
	40.0-47.0	59.5-69.9	20-339-3596	8.437	214.3				
	47.0-53.5	69.9-79.6	20-339-4595	8.218	208.7	4.000	101.6	4.500	114.3
	40.0-47.0	59.5-69.9	20-339-4596	8.437	214.3				
	29.3-36.0	43.6-53.6	20-339-4597	8.593	218.3				